

RAPID RESPONSE HP 40 CLAMP

THE WORLDS FASTEST WAY TO REPAIR DAMAGED PIPEWORK.



BETTER BY DESIGN

5x **FASTER**

EASY TO INSTALL

NO TOOLS REQUIRED

ONE-PERSON INSTALLATION

WAYS

ONE CLAMP COVERS A WIDE RANGE OF DIAMETERS

S REUSABLE

Specification

TYPE OF CLAMP	SINGLE	DUAL	TRIPLE	QUAD
WIDTH DIMENSION	70 mm	148 mm	210 mm	272 mm
PIPE DIAMETER	75-930 mm	75-930 mm	75-930 mm	75-930 mm
PRESSURE RATING	40 BAR**	40 BAR**	40 BAR**	40 BAR**
TEMPERATURE RANGE SEAL MATERIAL: NITRILE	(-20°C) TO (115°C)	(-20°C) TO (115°C)	(-20°C) TO (115°C)	(-20°C) TO (115°C)
SEAL MATERIAL: VITON	(-26°C) TO (205°C)	(-26°C) TO (205°C)	(-26°C) TO (205°C)	(-26°C) TO (205°C)

Rapid Response Clamps can be ordered individually or supplied in bulk. Larger sizes can be made to order.

VPG Rapid Response Clamps

The fastest solution for pipeline damage control. Reduces risks and repair costs over all industries dependant on highly reliable piping. With design features unmatched by any competitor, VPG Clamps can be installed in less than 60 seconds.

Applications

- Maritime
- Mining
- Oil and gas
- Refining
- Aviation
- Chemical
- Process Manufacturing

VPG Rapid Response Clamp Offers

- Increased repair success and asset survivability
- Highly effective for environmental damage control
- Improved assets protection
- Avoids disrupting your production workflow
- Lower Total Cost of Ownership


Ease of use

Only 8 different sizes are required to span the standard range from 38mm to 930mm pipe diameters. No tools are required for its installation.

Quality Design

- Marine-grade stainless steel body
- Nitrile seal suitable for water, gas and most petroleum liquids. Alternatively, a Viton gasket material option is available for applications require higher temperature capability.

VPG CLAMP PRESSURE CHART

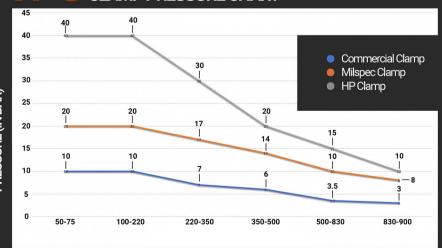

Selection choices

4 Variants of Rapid Response Clamps are available:

- Commercial 10 Bar.
- Milspec 20 Bar.
- HP40 40 Bar.
- SDR11 16 Bar.



PIPE DIAMETER (IN MM)

^{*} Up to diameter 220mm